


# SKM 300GB124D

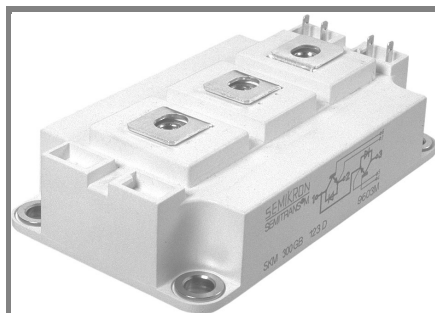

**SEMITRANS™ 3**

## Low Loss IGBT Modules


### SKM 300GB124D

#### Features

- MOS input (voltage controlled)
- N channel, homogeneous Si-structure (NPT - Non punch-through IGBT)
- Low inductance case
- Very low tail current with low temperature dependence
- High short circuit capability, self limiting to  $6 \times I_{Cnom}$
- Latch-up free
- Fast & soft CAL diodes
- Isolated copper baseplate using DBC Direct copper Bonding Technology
- Large clearance (12 mm) and creepage distances (20 mm)

#### Typical Applications







- Switching (not for linear use)
- AC inverter drives
- UPS









GB




Absolute Maximum Ratings		$T_c = 25\text{ °C}$ , unless otherwise specified	
Symbol	Conditions	Values	Units
<b>IGBT</b>			
$V_{CES}$		1200	V
$I_C$	$T_c = 25\text{ (65) °C}$	380 (300)	A
$I_{CRM}$	$t_p = 1\text{ ms}$	400	A
$V_{GES}$		$\pm 20$	V
$T_{vj}$ ( $T_{stg}$ )	$T_{OPERATION} \leq T_{stg}$	- 40 ... + 150 (125)	°C
$V_{isol}$	AC, 1 min.	2500	V
<b>Inverse diode</b>			
$I_F$	$T_c = 25\text{ (80) °C}$	260 (180)	A
$I_{FRM}$	$t_p = 1\text{ ms}$	400	A
$I_{FSM}$	$t_p = 10\text{ ms}$ ; sin.; $T_j = 150\text{ °C}$	2200	A

Characteristics		$T_c = 25\text{ °C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>IGBT</b>					
$V_{GE(th)}$	$V_{GE} = V_{CE}$ ; $I_C = 8\text{ mA}$	4,5	5,5	6,5	V
$I_{CES}$	$V_{GE} = 0$ ; $V_{CE} = V_{CES}$ ; $T_j = 25\text{ (125) °C}$		0,2	0,6	mA
$V_{CE(TO)}$	$T_j = 25\text{ (125) °C}$		1,1 (1,1)	1,25 (1,25)	V
$r_{CE}$	$V_{GE} = 15\text{ V}$ ; $T_j = 25\text{ (125) °C}$		5 (6,5)	6 (8)	mΩ
$V_{CE(sat)}$	$I_{Cnom} = 200\text{ A}$ ; $V_{GE} = 15\text{ V}$ ; chip level		2,1 (2,4)	2,45 (2,85)	V
$C_{ies}$	under following conditions		13		nF
$C_{oes}$	$V_{GE} = 0$ ; $V_{CE} = 25\text{ V}$ ; $f = 1\text{ MHz}$		2		nF
$C_{res}$			1	1,3	nF
$L_{CE}$				20	nH
$R_{CC'+EE'}$	res.; terminal-chip $T_c = 25\text{ (125) °C}$		0,35 (0,5)		mΩ
$t_{d(on)}$	$V_{CC} = 600\text{ V}$ ; $I_{Cnom} = 200\text{ A}$		90		ns
$t_r$	$R_{Gon} = R_{Goff} = 6\text{ Ω}$ ; $T_j = 125\text{ °C}$		60		ns
$t_{d(off)}$	$V_{GE} = \pm 15\text{ V}$		600		ns
$t_f$			55		ns
$E_{on} (E_{off})$			29 (28)		mJ
<b>Inverse diode</b>					
$V_F = V_{EC}$	$I_{Fnom} = 200\text{ A}$ ; $V_{GE} = 0\text{ V}$ ; $T_j = 25\text{ (125) °C}$		2 (1,8)	2,5	V
$V_{(TO)}$	$T_j = 125\text{ ( ) °C}$		1,1	1,2	V
$r_T$	$T_j = 125\text{ ( ) °C}$			5,5	mΩ
$I_{RRM}$	$I_{Fnom} = 200\text{ A}$ ; $T_j = 125\text{ ( ) °C}$		120		A
$Q_{rr}$	$di/dt = A/\mu s$		25		μC
$E_{rr}$	$V_{GE} = V$				mJ
<b>Thermal characteristics</b>					
$R_{th(j-c)}$	per IGBT			0,075	K/W
$R_{th(j-c)D}$	per Inverse Diode			0,18	K/W
$R_{th(c-s)}$	per module			0,038	K/W
<b>Mechanical data</b>					
$M_s$	to heatsink M6	3		5	Nm
$M_t$	to terminals M6				Nm
w				325	g

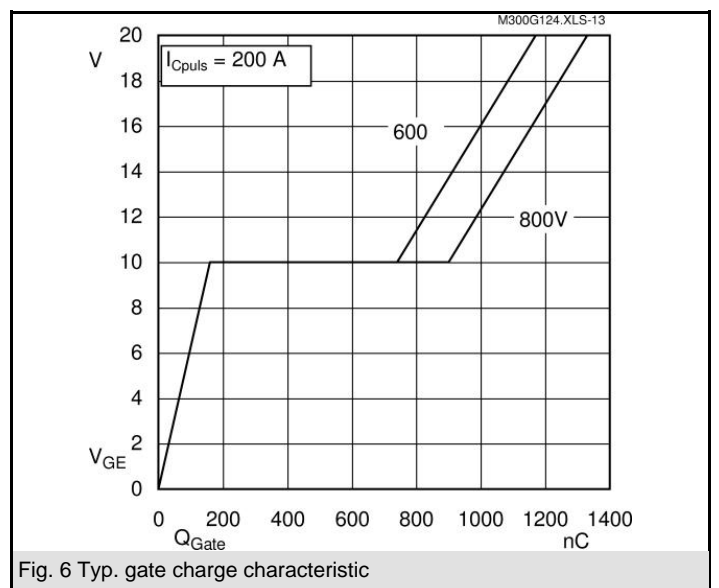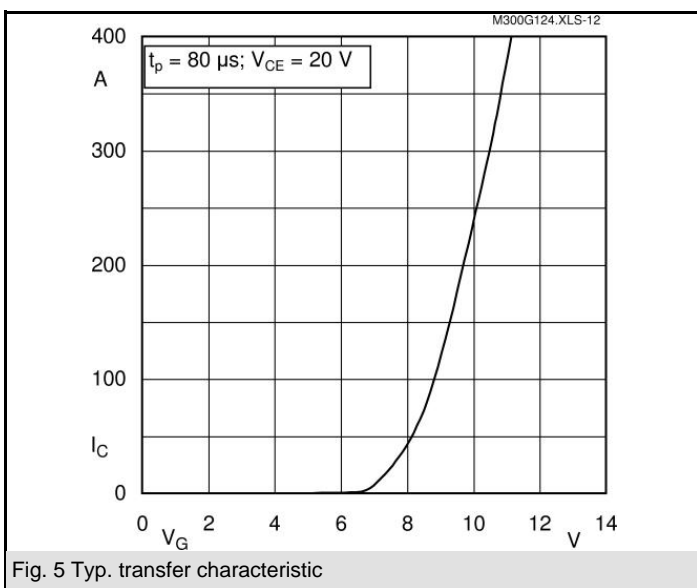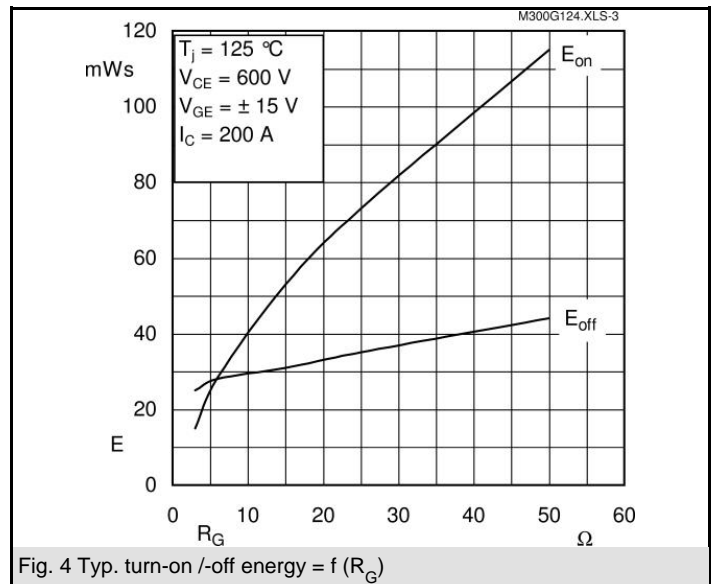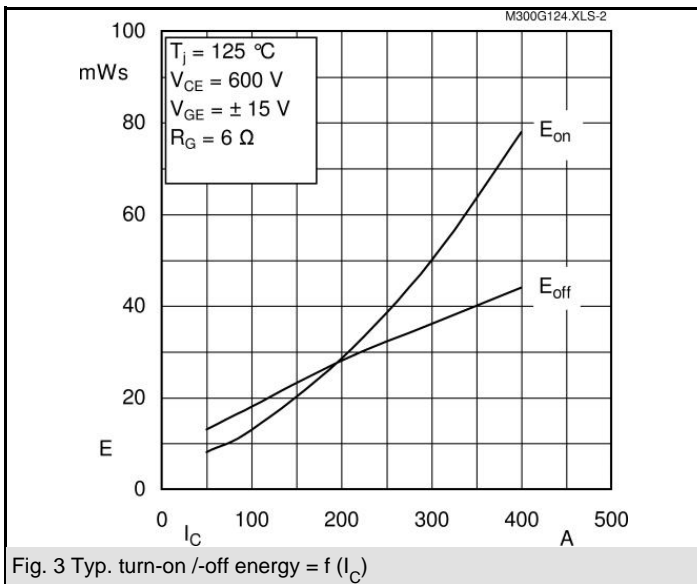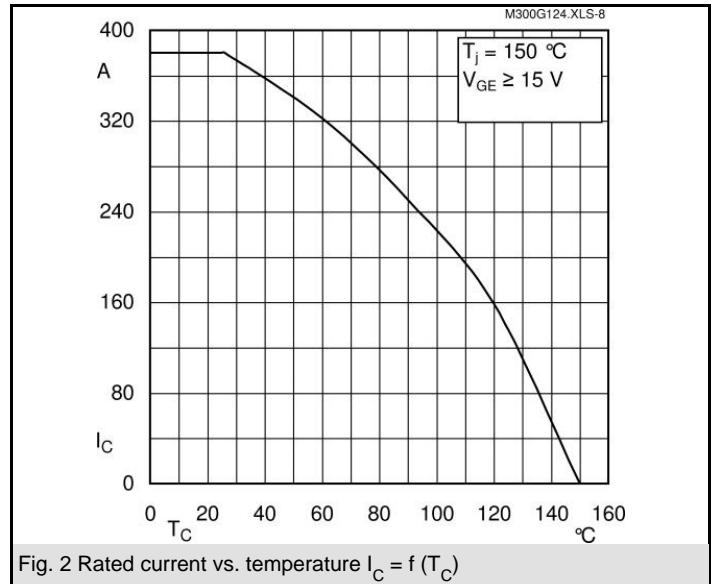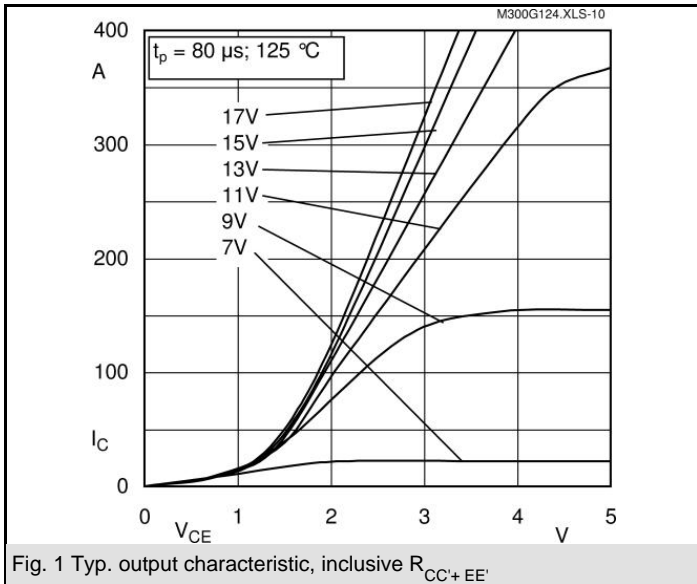

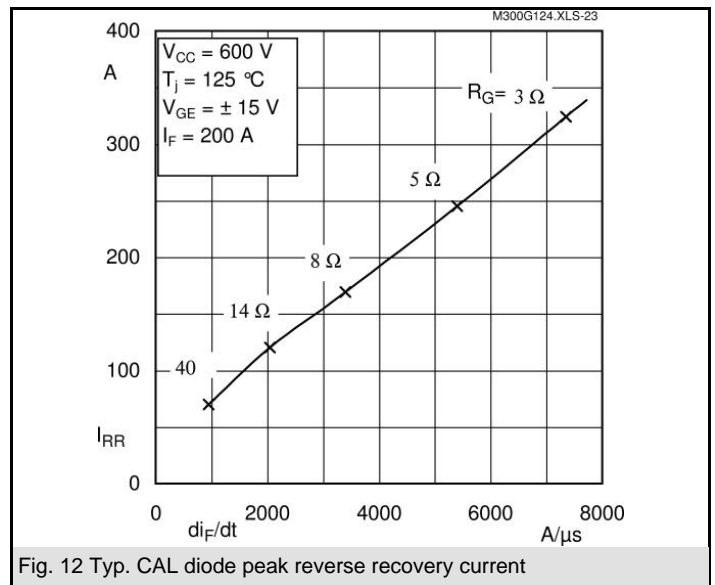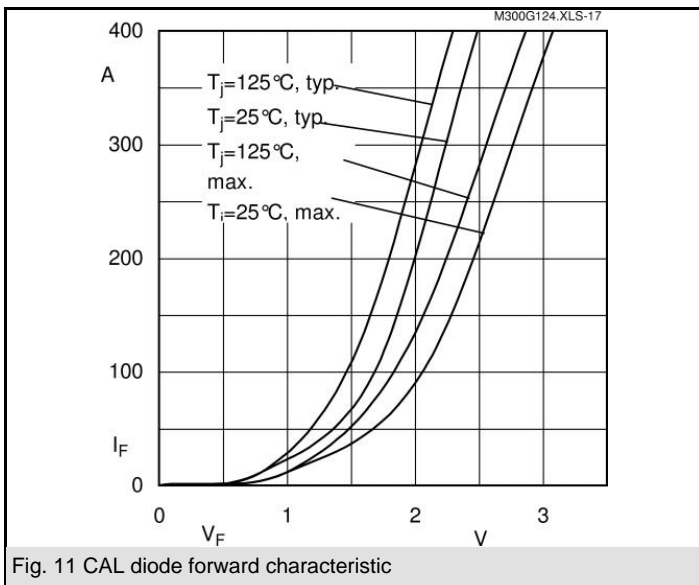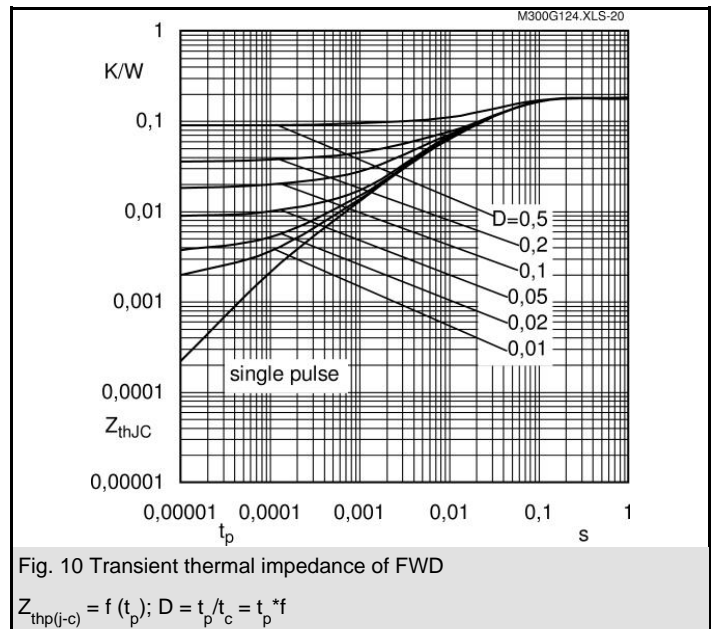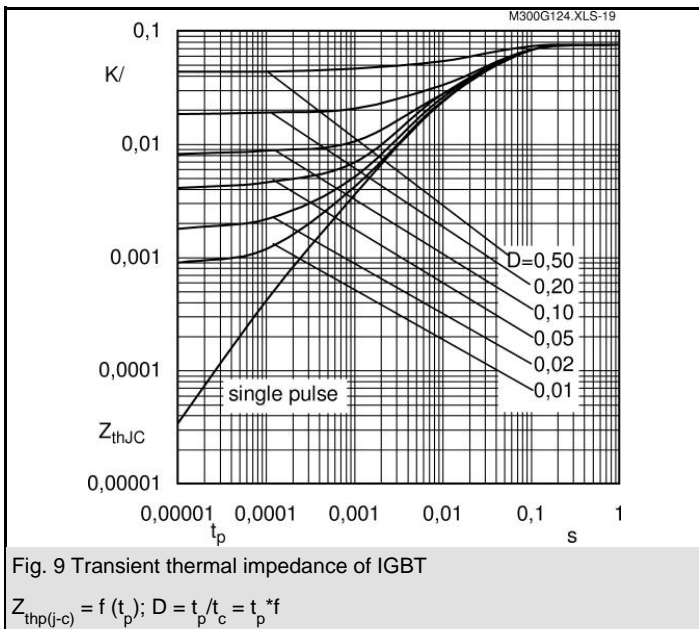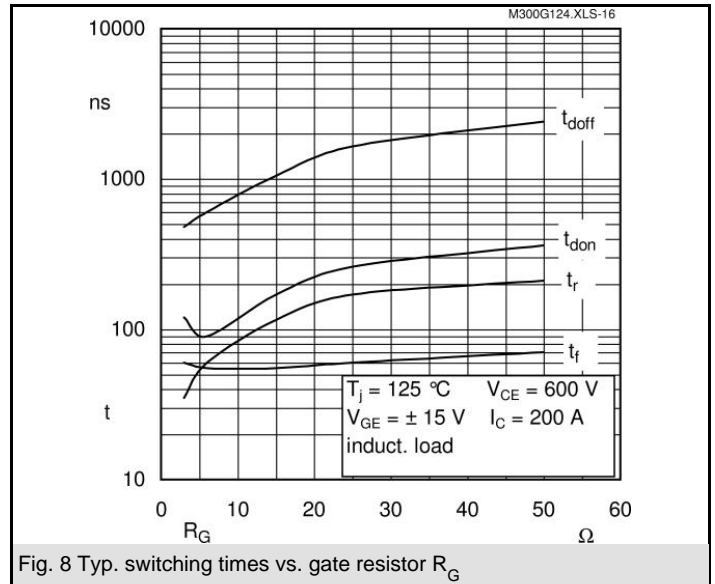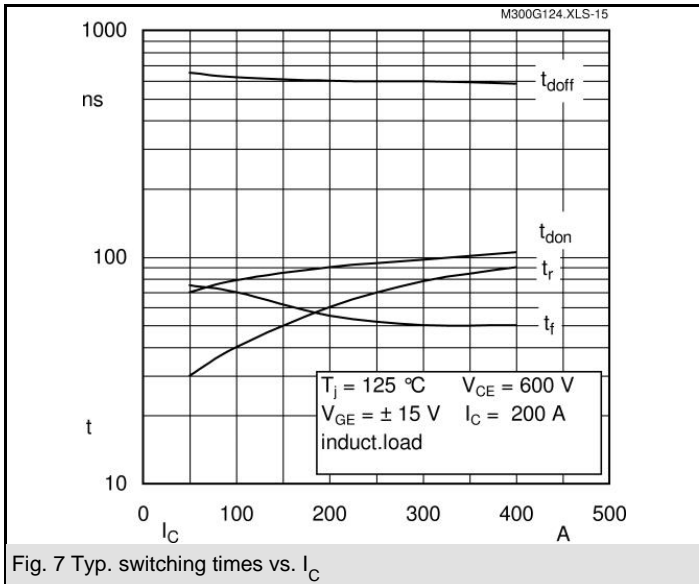

# SKM 300GB124D

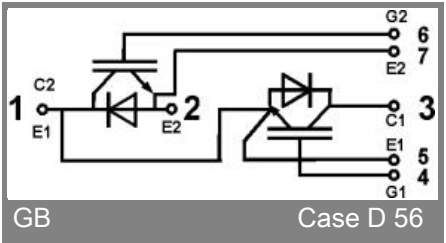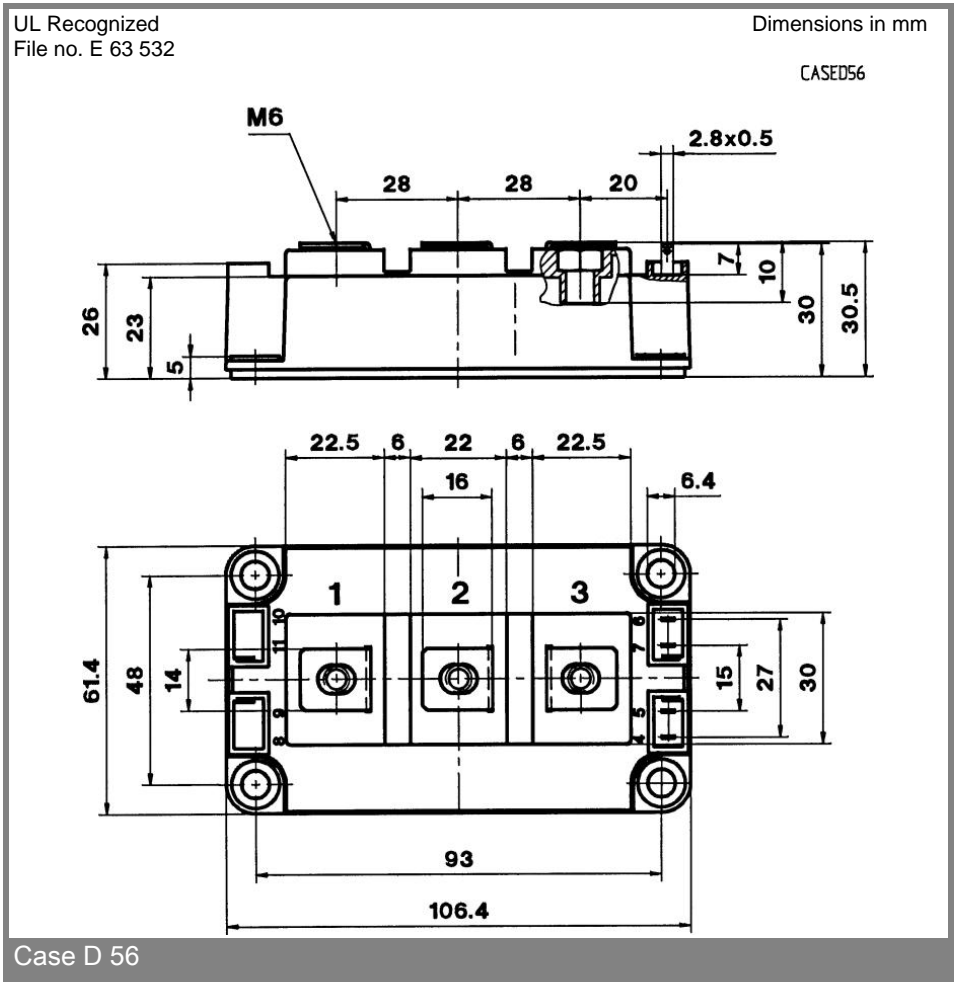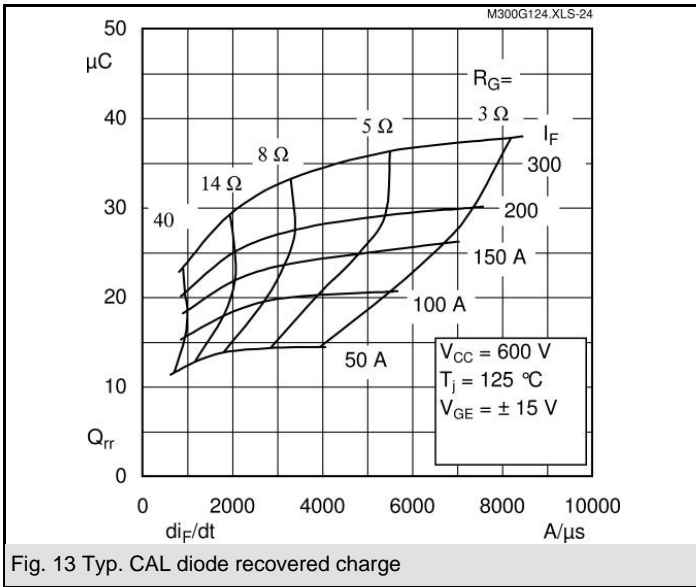

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.