

# SKM 400GA128D



**SEMITRANS<sup>®</sup> 4**

## SPT IGBT Modules

**SKM 400GA128D**

### Features


- SPT = Soft-Punch-Through technology
- $V_{CEsat}$  with positive temperature coefficient
- High short circuit capability, self limiting to  $6 \times I_C$

### Typical Applications

- AC inverter drives
- UPS
- Electronic welders at  $f_{sw}$  up to 20 kHz

### Remarks

- $I_{DC} \leq 500$  A for  $T_{Terminal} = 100$  °C



GA

Absolute Maximum Ratings		$T_c = 25^\circ\text{C}$ , unless otherwise specified		
Symbol	Conditions	Values		Units
<b>IGBT</b>				
$V_{CES}$	$T_j = 25^\circ\text{C}$	1200		V
$I_C$	$T_j = 150^\circ\text{C}$	$T_c = 25^\circ\text{C}$	565	A
		$T_c = 80^\circ\text{C}$	400	A
$I_{CRM}$	$I_{CRM} = 2 \times I_{Cnom}$	600		A
$V_{GES}$		$\pm 20$		V
$t_{psc}$	$V_{CC} = 600$ V; $V_{GE} \leq 20$ V; $T_j = 125^\circ\text{C}$ $V_{CES} < 1200$ V	10		$\mu\text{s}$
<b>Inverse Diode</b>				
$I_F$	$T_j = 150^\circ\text{C}$	$T_{case} = 25^\circ\text{C}$	390	A
		$T_{case} = 80^\circ\text{C}$	260	A
$I_{FRM}$	$I_{FRM} = 2 \times I_{Fnom}$	600		A
$I_{FSM}$	$t_p = 10$ ms; sin.	$T_j = 150^\circ\text{C}$	2900	A
<b>Module</b>				
$I_{t(RMS)}$		500		A
$T_{vj}$		- 40... + 150		°C
$T_{stg}$		- 40... + 125		°C
$V_{isol}$	AC, 1 min.	4000		V

Characteristics		$T_c = 25^\circ\text{C}$ , unless otherwise specified			
Symbol	Conditions	min.	typ.	max.	Units
<b>IGBT</b>					
$V_{GE(th)}$	$V_{GE} = V_{CE}$ , $I_C = 12$ mA	4,5	5,5	6,45	V
$I_{CES}$	$V_{GE} = 0$ V, $V_{CE} = V_{CES}$	$T_j = 25^\circ\text{C}$	0,2	0,6	mA
		$T_j = 125^\circ\text{C}$	0,9	1,05	V
$V_{CE0}$			1	1,15	V
$r_{CE}$	$V_{GE} = 15$ V	$T_j = 25^\circ\text{C}$	3	4	m $\Omega$
		$T_j = 125^\circ\text{C}$	4	5	m $\Omega$
$V_{CE(sat)}$	$I_{Cnom} = 300$ A, $V_{GE} = 15$ V	$T_j = 25^\circ\text{C}_{chiplev.}$	1,9	2,35	V
		$T_j = 125^\circ\text{C}_{chiplev.}$	2,1	2,55	V
$C_{res}$	$V_{CE} = 25$ , $V_{GE} = 0$ V	$f = 1$ MHz	26		nF
$C_{oes}$			3		nF
$C_{res}$			3		nF
$Q_G$	$V_{GE} = -8$ V - +20V	3500		nC	
$R_{Gint}$	$T_j = ^\circ\text{C}$	1,25		$\Omega$	
$t_{d(on)}$	$R_{Gon} = 5$ $\Omega$	$V_{CC} = 600$ V $I_{Cnom} = 300$ A	120		ns
$t_r$			70		ns
$E_{on}$			31		mJ
$t_{d(off)}$	$R_{Goff} = 5$ $\Omega$	$T_j = 125^\circ\text{C}$ $V_{GE} = \pm 15$ V	800		ns
			75		ns
$E_{off}$			33		mJ
$R_{th(j-c)}$	per IGBT	0,055		K/W	



**SEMITRANS<sup>®</sup> 4**

## SPT IGBT Modules

### SKM 400GA128D

#### Features


- SPT = Soft-Punch-Through technology
- $V_{CEsat}$  with positive temperature coefficient
- High short circuit capability, self limiting to  $6 \times I_C$

#### Typical Applications

- AC inverter drives
- UPS
- Electronic welders at  $f_{sw}$  up to 20 kHz

#### Remarks

- $I_{DC} \leq 500 \text{ A}$  for  $T_{Terminal} = 100 \text{ }^\circ\text{C}$

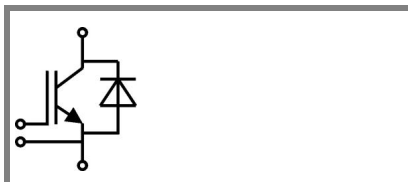







GA







#### Characteristics

Symbol	Conditions	min.	typ.	max.	Units
<b>Inverse Diode</b>					
$V_F = V_{EC}$	$I_{Fnom} = 300 \text{ A}; V_{GE} = 0 \text{ V}$				
	$T_j = 25 \text{ }^\circ\text{C}_{chiplev.}$		2	2,5	V
	$T_j = 125 \text{ }^\circ\text{C}_{chiplev.}$		1,8		V
$V_{F0}$	$T_j = 25 \text{ }^\circ\text{C}$		1,1	1,2	V
$r_F$	$T_j = 25 \text{ }^\circ\text{C}$		3	4,3	m $\Omega$
$I_{RRM}$	$I_{Fnom} = 300 \text{ A}$		345		A
$Q_{rr}$	$di/dt = 5200 \text{ A}/\mu\text{s}$		48		$\mu\text{C}$
$E_{rr}$	$V_{GE} = -15 \text{ V}; V_{CC} = 600 \text{ V}$		20		mJ
$R_{th(j-c)D}$	per diode			0,125	K/W
<b>Module</b>					
$L_{CE}$			15	20	nH
$R_{CC+EE}$	res., terminal-chip	$T_{case} = 25 \text{ }^\circ\text{C}$	0,18		m $\Omega$
		$T_{case} = 125 \text{ }^\circ\text{C}$	0,22		m $\Omega$
$R_{th(c-s)}$	per module			0,038	K/W
$M_s$	to heat sink M6		3	5	Nm
$M_t$	to terminals M6 (M4)		2,5 (1,1)	5 (2)	Nm
w				330	g

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX.

This technical information specifies semiconductor devices but promises no characteristics. No warranty or guarantee expressed or implied is made regarding delivery, performance or suitability.

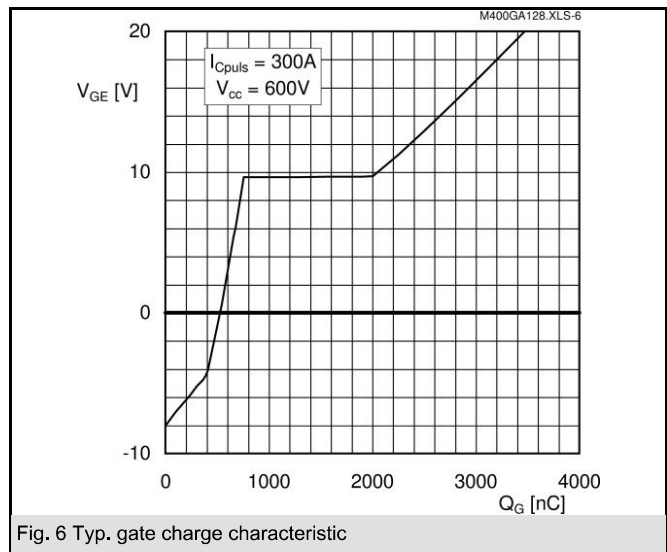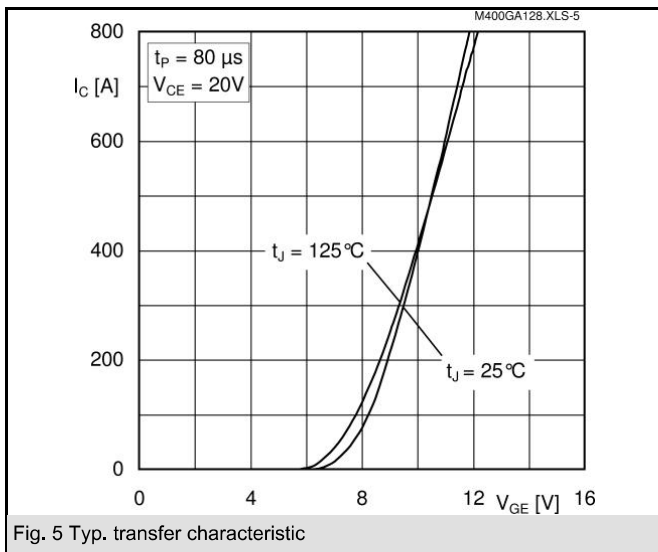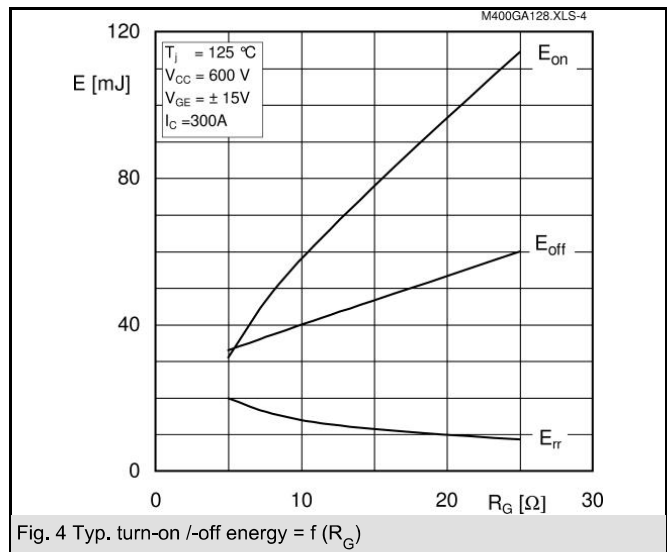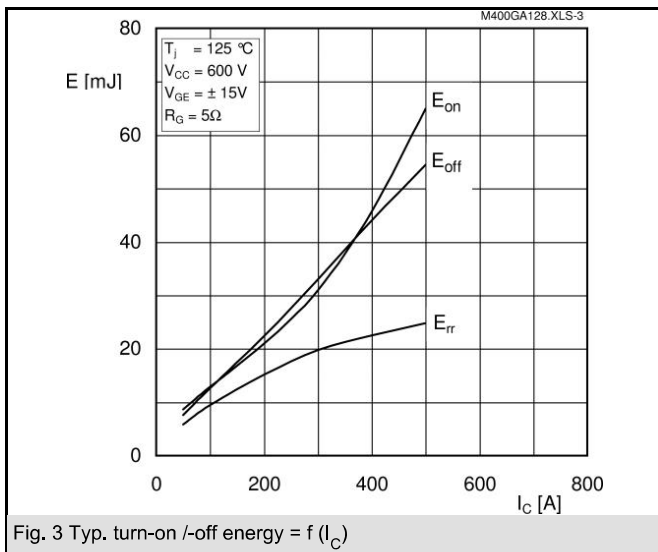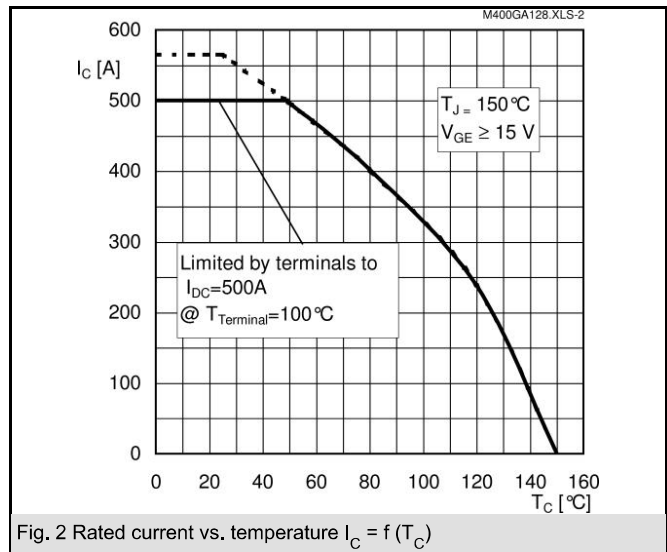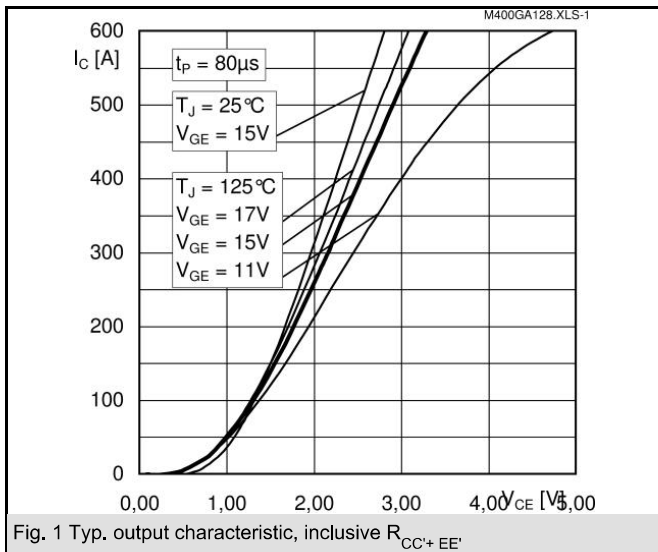

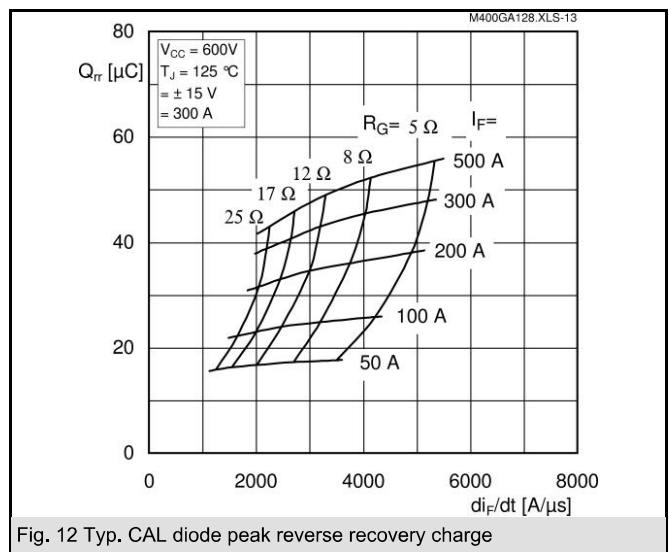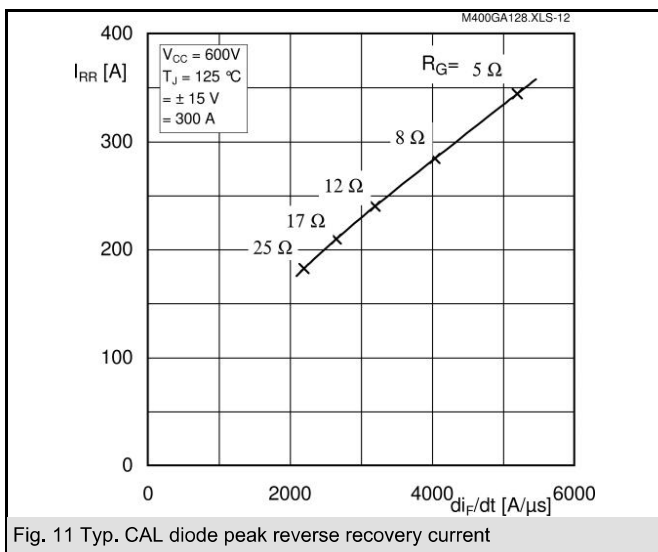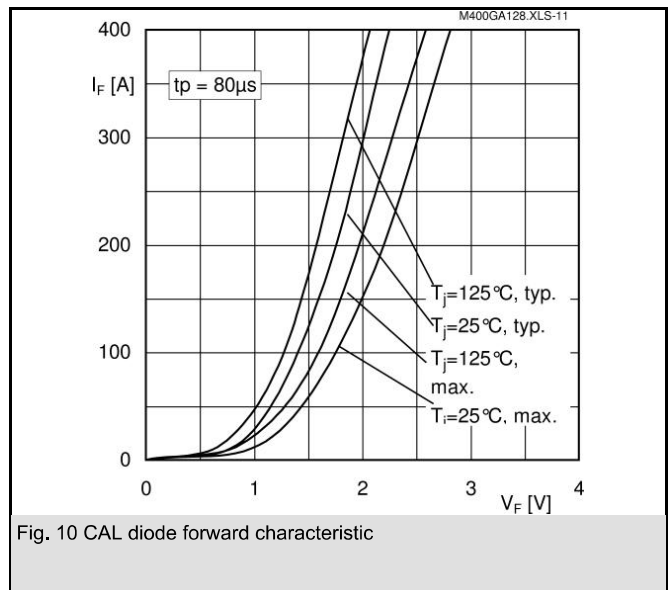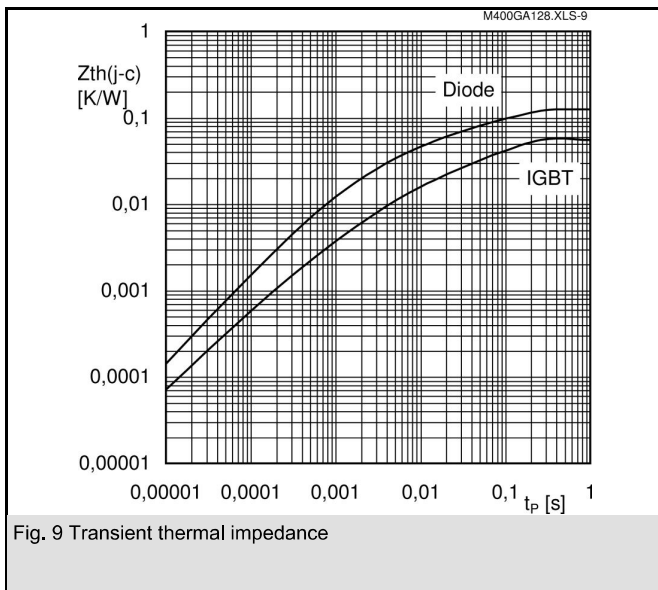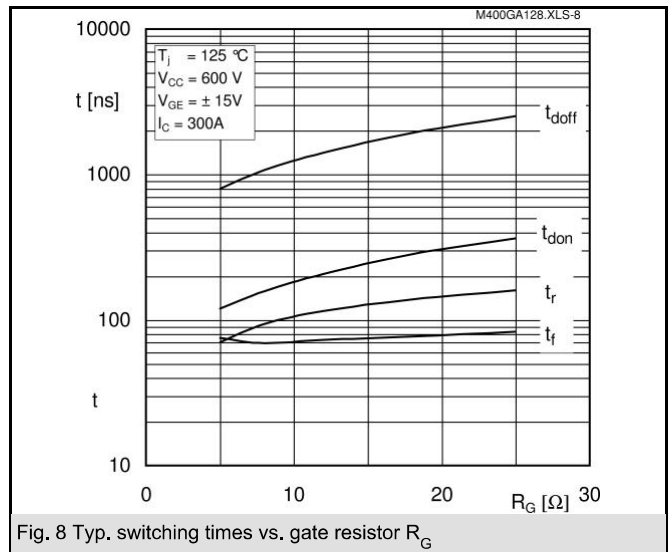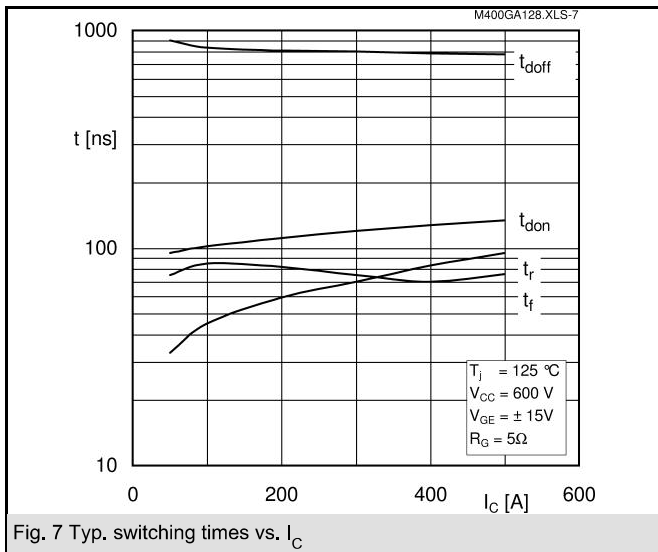


# SKM 400GA128D


UL Recognized

CASED59

File 63 532

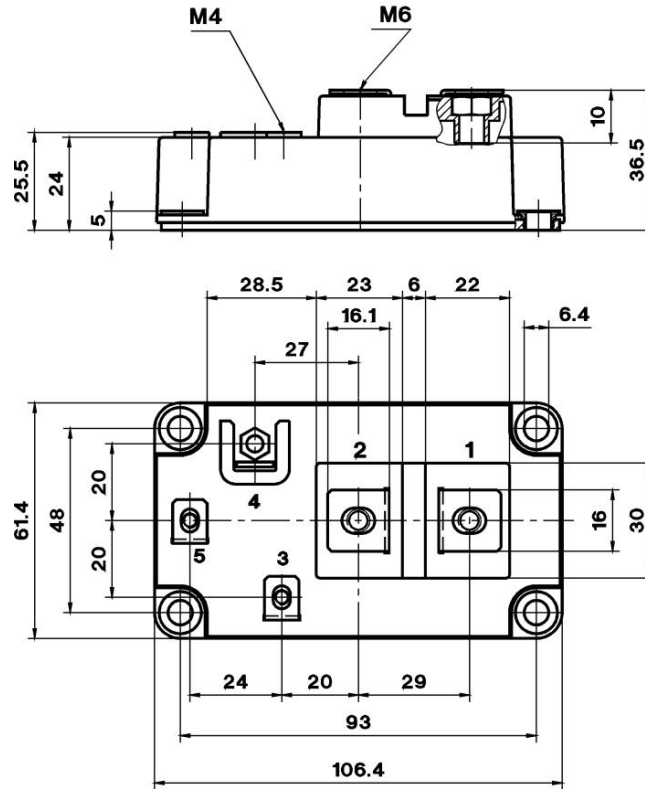

Case D 59

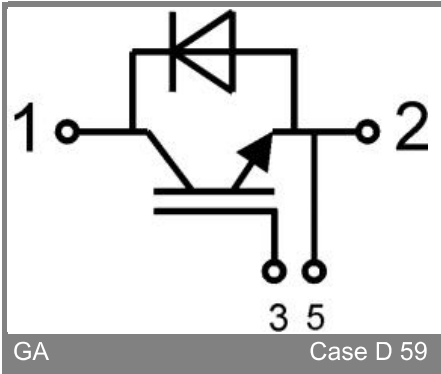

GA

Case D 59